

Experimental Study of Fruit Drying (Italian Bergamot Origin). By Solar Collectors with Variable Baffles in the Shape of a Cone with an Apex Angle of 45°

Abderrahmane ABENE

Hauts-de-France Polytechnic University (UPHF), INSA: National Institute of Applied Sciences Hauts-de-France

ABSTRACT

The application of solar drying by air-air solar collectors to determine air temperature and drying Bergamot is a citrus fruit native to the Mediterranean, well known in Italy in order to sustainably preserve quality such as freshness and flavor, bergamot is a noble fruit and the properties of bergamot are very good for health. A content like many citrus fruits, bergamot has a high content of vitamin C, the antioxidant vitamin par excellence, which will allow you to boost your immune defenses and fight against winter diseases. Vitamin C also helps fight against oxidative stress responsible for premature aging of cells. Two good reasons to include bergamot in the kitchen among the minerals, useful for fighting against premature ageing. Finally, it is rich in soluble fiber with multiple health benefits. Sun drying for sustainable conservation management from the citrus family, bergamot is a fruit associated with multiple health benefits. It would be good for digestion, for the prevention of cancer, against fatigue or for weight loss. Keywords/ drying bergamot, solar air-air collectors; from Italy, temperature, baffle solar collectors.

Corresponding author

Dr. (HDR) Abderrahmane ABENE, Hauts-de-France Polytechnic University (UPHF), INSA: National Institute of Applied Sciences Hauts-de-France. E-mail: a_abene@yahoo.fr

Received: October 23, 2022; **Accepted:** November 08, 2022; **Published:** November 14, 2022

Nomenclature

Ac: surface activates plane solar collector [m^2]
 b: width of the baffles at the base
 b': coefficient of blocking
 C_p: heat capacity of the air [$J/Kg.K$]
 d: outdistance between the absorber and the cover or the insulator
 El: longitudinal space between lines of baffles
 Et: space transverse between two baffles of the same line
 h: initial height of the baffles
 h₁: swing-over bed of the baffles compared to the insulator
 h_{ccf}: coefficient of convectif heat exchange enters the air and the absorber [$W/K.m^2$]
 I_{GS}: total time solar flow of simulation [W/m^2]
 K_a, K_s: thermal conductivity of the absorber and the insulator [$W/m.K$]
 L: longitude of the place [degrees]
 Z: altitude of place [km]
 ℓ: width of the vein [m]
 m_c: speed of drying [Kg/s]
 N_{Cr}, N_r: a number of baffles per line and a number of lines
 P_{mc}: consumed mechanical power of the ventilator [W]
 P_o, P(Z): pressure atm on the sea level (10.13 105 Pa) and with altitude Z of place [Pa]
 QV_a: volume throughput of the air in the sensor [m^3/h]
 QV: volume throughput of the air per unit of area [$m^3/h.m^2$]
 Q_u: quantity of useful heat on the outlet side of sensor [MJ]
 Q_S: quantity of heat of drying of product [MJ]
 r: ray of bending of the baffles

Re: Reynolds number

S_{mini}: minimal bypass section of the air in the vein [m^2]
 T_{SV}, T_a: temperature at the exit of the ventilator and the ambient air [$^{\circ}C$]
 T_e, T_{sc}: temperature of the air at the entry and the outlet side of the sensor [$^{\circ}C$]
 T_{pr}: temperature on the level of the surface of the product [$^{\circ}C$]
 V_m: maximum speed of the air flow in the vein [m/s]
 X_{bs}: water content at base dries of the product [Kg/KgMS]
 X_{Obs}, X_{ibs}: water content initial and final at base dries [Kg/KgMS]

Greek Letters

α: angle of inclination of the sensor compared to the ground [degrees]
 β: angle of apex (or at the top) of the baffles [degrees]
 ε_e: coefficient of emissivity of the cover
 φ: latitude of the place [degrees]
 ν: viscosity kinematic of the air [m^2/s]
 ρ_o, ρ: masse voluminal of the air on the sea level and altitude Z of the place [Kg/m^3]
 η, η_t: output of the plane solar collector and thermal efficiency of the system of drying [%]
 τc: coefficient of transmission of cover
 ζ: factor of friction characterizing artificial roughnesses (obstacles)
 Δi: angle of bending of the baffles [degrees]
 ΔM: loss of mass of the product [%]
 ΔP: pressure losses in the vein of sensor [Pa]
 ΔQ: quantity heat excédentaire [MJ]

Notations

DCL1: Forme of the baffles in the mobile vein of air: Delta and Curved Longitudinally with the flow attacking by point

OCL1: Forme baffles in the mobile vein of air: Ogival Curved Longitudinally with the flow attacking by point

WB, TL: Without Baffles and Transversal-Longitudinal baffles

η_S : Rendement of sensor WB

η_D : Rendement of the sensor provided with baffles DCL1

η_{TL} : Rendement of the sensor provided with baffles TL

$X_{bs, TL13}$: Tenor out of water at dry base in the case with the sensor provided with baffles TL, on the level of the 1st tray, using the flow of 31.3 m³/h.m²

$\Delta MD13$: Perte of mass of the product in the case of the sensor provided with baffles DCL1, on the level of the 1st tray, using the flow of 31.3 m³/h.m²

$T_{pr, S17}$: Temperature of the product in the case of sensor WB, on the level of the 1st tray, using the flow of 70 m³/h.m².

$m_e D47$: Speed of drying in the case of the sensor provided with baffles DCL1, on the level of the 4th tray, using the flow of 70 m³/h.m²

$Q_{u, S3}$: Quantity of useful heat, in the case of sensor WB, using the flow of 31.3 m³/h.m²

$Q_{s, D7}$: Quantity of heat of drying, in the case of the sensor provided with baffles DCL1, using the flow of 70 m³/h.m².

The baffles have to be placed very carefully. They can be fixed either onto the insulating material or under the absorber or indeed in both positions. In all three cases, results are improved because of the reduction of the hydraulic diameter (D_h) when compared with the performances of solar panels without baffles. In the air flow vein, the Reynolds number is calculated by starting from the maximum speed (V_m) corresponding to the minimum air flow section of the duct (S_{min}) and is expressed by:

$$Re = \frac{V_m \cdot D_h}{\nu} = \frac{Q_v \cdot D_h}{\nu \cdot S_{min}} \quad \text{with} \quad D_h = \frac{2dl}{d+l}$$

By $d \ll l \Rightarrow d+l \approx l$ so $D_h = 2d$

$$\text{Posing } b' = 1 - \frac{S_{min}}{dl} \quad \text{we are} \quad Re = \frac{2Q_v}{\nu \cdot l \cdot (1-b')} \quad (1)$$

D_h : the hydraulic diameter of the duct

b' : the blockage coefficient in the air vein

The coefficient of thermal convection interchange (h_{ccf}) between the absorber and the coolant fluid is dependent on the Reynolds number; it is an increasing Re function, otherwise h does not increase. It can therefore be deduced that when b' increases, both Re, and consequently h_{ccf} increase. The minimum air flow section of the duct (S_{min}) is dependent on the shape of the baffles, their dimensions and their layout in relation one to another. The following three positional fixings of the baffles have been studied:

fixed on the insulating material: depending on the shape chosen, the flow becomes turbulent and the fragmentation of the vortices takes place very close to the absorber towards which the air is directed and the heat transfer is improved the aeraulic effect, these baffles also act as vanes which means that the heat transfer capacity emanating from the absorber surface increases and which in turn contributes to the improvement of the efficiency of the solar panel. Concerning some of these forms already studied, the

results obtained have shown that with a low air flow, the efficiency increases whereas with an air flow higher than a given value, the efficiency tends to decrease [1]. Where the airflow is very strong, eddies are much more evident near the insulating material. This positioning of the baffles results in less efficient performance. Indeed, at the end of the blades, the air temperature is lower than it is at the level of the abrber.

- To improve the performance of this second positioning, some intermediate baffles can be fixed onto the insulating material which will convey air flow towards the absorber [2]. In this case, charge losses in the solar panel will be higher and its thermal inertia will increase.

Given the above findings and to continue with the experiments, it was decided to fix the baffles onto the insulating material. When choosing the geometrical shape of the baffles to be used, certain criteria have to be satisfied. Indeed, both the layout and the shape of the baffles influence air flow during its trajectory. The baffles ensure that the absorber is well irrigated, reduce the zones of inertia, create turbulence and lengthen the course of the air by increasing the time it remains in the solar panel. A meticulous and systematic study was then undertaken of several different methods of arrangement of the air flow veins in the solar panels.

The first part of this paper deals with a comparison of the results obtained, initially using solar panels without baffles (SC) and then with baffles. Of the latter, two types were selected, namely Delta-shaped Curved Longitudinally (DCL1) and Ogival-shaped Curved Longitudinally (OCL1) baffles. The second part concerns the results obtained when firstly using solar panels without baffles and then with DCL1 baffles for the drying of bergamot ition, to conduct experiments that would highlight the effects of baffles even further, lemon were dried by using a solar panel provided with Transversal-Longitudinal ones (TL) of the same type as those already studied [4]. A comparison of the results obtained shows that a solar panel provided with baffles is far more efficient than one without them.

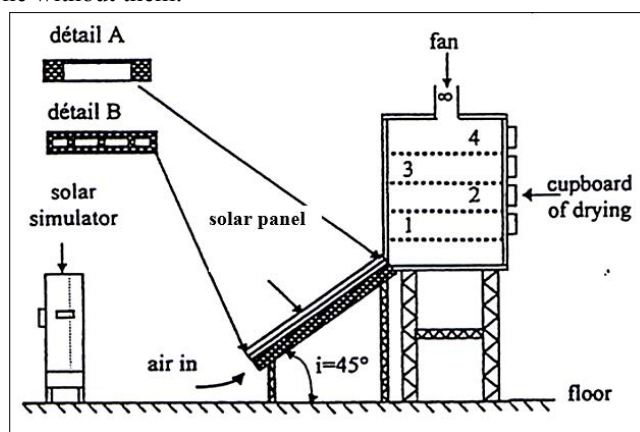


Figure 1: Experimental device

The solar panel with a single passage of air (Fig. 2) consists of:

- A transparent, alveolar, 1 cm thick polycarbonate cover. The coefficients of transmission (τ_c) and emissivity (ϵ_c) are respectively 83% and 90% for different wavelengths
- An absorber made of a 0.4 mm thick aluminium sheet painted in mat black on the insulation side. The thermal conductivity (α_a) and absorption (K_a) coefficients are respectively 95% and 205W/m.K. The distance (d) on each side of the absorber is 0.025m.

- A 5 cm thick polystyrene plate of insulating material, which can resist temperatures higher than 90°C. Its coefficient of thermal conductivity (K_{is}) is equal to 0.04 W/m.K.

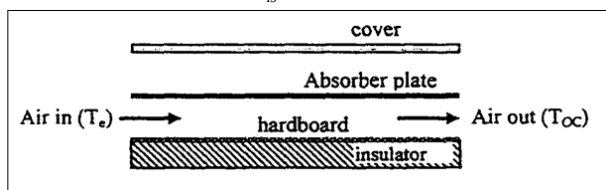


Figure 2: Solar Air Flat Plate Collector without Obstacles

Too, the shape of the inlet (details A) and outlet (details B) of air of the solar panel have to be carefully arranged so as to avoid heating any dead zones. The baffles are fixed on a hardboard sheet just above the polystyrene plate. The experiments took place at Valenciennes in North-East France, the co-ordinates of which are : latitude : $\varphi = 50.3^\circ$; altitude : $Z = 60$ m; longitude : $L = 3.5^\circ$, and on a day in July which was considered typical of mean solar time flux (Fig. 3) and which corresponds with the average for the years 1998, 1999 and 2000 [9].

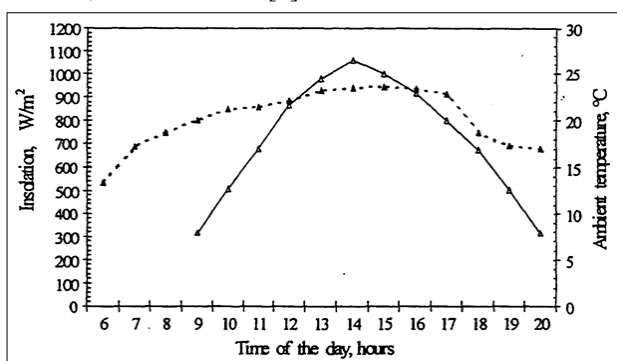



Figure 3: Variation of the ambient temperature and the insolation during the characteristic day of July, at Valenciennes global hourly insolation (IGS); ambient temperature (T_a)

Results and Analysis

Improvements to the Ratio between Temperature and Thermal Efficiency

A means of extracting the maximum of heat stored in the absorber is to place baffles in the mobile vein of air; they can be fixed either on the underside of the absorber or onto the insulating material, or indeed on both places. The objective is thereby to raise the temperature at the solar panel outlet (T_{sc}), *i.e.* increasing thermal efficiency, and to reduce charge losses to a minimum [2-8]. Results have been obtained using the solar panel without baffles and subsequently provided with baffles in two stages, firstly with the DCL1 type and then with the OCL1 (Photographs 1 and 2).

Photograph 1: Layout with DCL1 type baffles

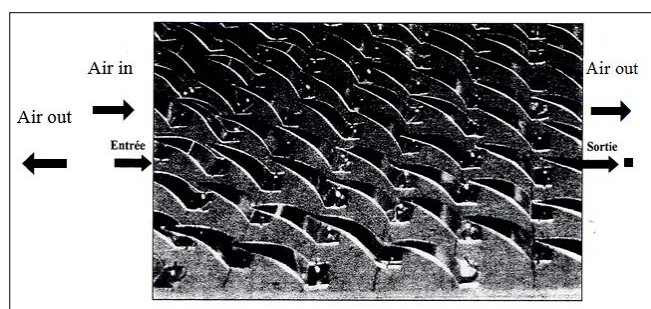

The baffles selected for use from the range of shapes already experimented with are formed by bending the otherwise straight delta and ogival wings (Fig. 5a and 5b) [10-12,27,29], and fixing them onto the insulating material (Fig. 4). The apex angle β of these baffles is 45° (Preferential angle) [13].

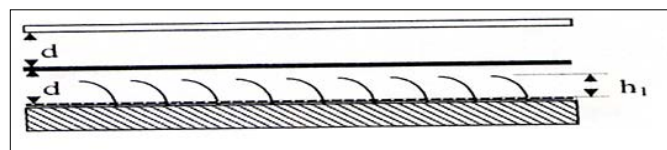


Figure 4: Solar Panel Equipped With Baffles

The index (1) referring to the DCL1 and OCL1 types of baffles indicates that the air flow takes place near their tips (Fig. 5b).

Experiments carried out in a wind tunnel [14] have shown that the increase in incidence enables swirling fragmentation to


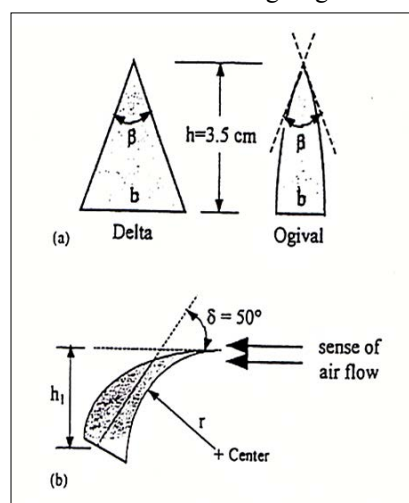


Figure 5: Delta and Ogival Baffles (a) Before Bending; (b) After Bending

Progress continuously on the upper surface of the curved wing. The flow ends in a total disorganisation of the swirling systems at the leak edge of the wing, which promotes the creation of a flow of considerable turbulence and, consequently, a better convective thermal interchange, which in turn improves the ratio between temperature and thermal efficiency. Total fragmentation of the swirls takes place at an incidence higher than 65°. The nature of the flow obtained as observed in the wind tunnel has been highlighted (Photographs 3a and 3b). Other such visualisations of other shapes of wings have confirmed results of these differing observations concerning the progressive fragmentation of swirls [15,26-28].

Table1: Specifications of DCL1 and OCL1 baffles

	DCL1	OCL1
β	45°	45°
H_1 (cm)	1.47	1.47
E_t (cm)	2.3	2.0
E/l (cm)	3.5	3.5
b (cm)	3.0	1.4
r (cm)	4.0	4.0
N_{cr}	15	22
N_r	44	44

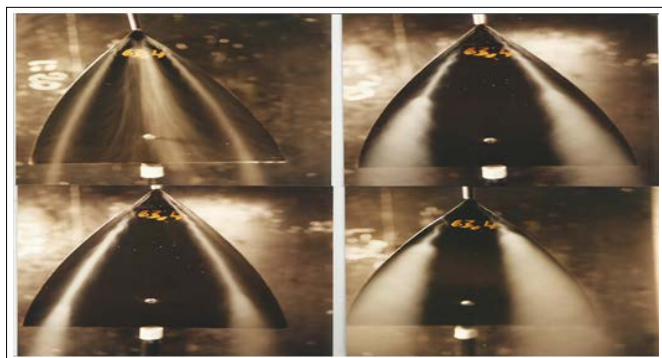

Photograph 2: Visualisation of Air Flow on the Upper Surface of the Curved Wing, Side View [15]

Prior to a presentation of the results obtained in this first part, an explanation of the mathematical expression used to calculate thermal efficiency is called for. The Letz model has been used as it is one of the most recent and complete formulae, being so because it takes into account not only the relative humidity of the air and the leak-flow of air as it is sucked into the sensor by the ventilator but also the temperatures at the inlet and outlet points of the solar panel [16]. According to prior enthalpy assessment, made by the authors of this paper, of the different modes selected for the experiments, thermal efficiency (η) is determined by:

$$\eta = \frac{\rho \cdot C_p \cdot Q_{V_a} \cdot (T_{sc} - T_e)}{I_{GS} \cdot A_C} \quad (2)$$

$$\eta = \frac{\rho \cdot C_p \cdot Q_V \cdot (T_{sc} - T_e)}{I_{GS}} \quad (3)$$

$$\rho = \rho_0 \frac{273}{273 + T_{SV}} \frac{P(Z)}{P_0} \quad (4)$$

Where $P(Z)/P_0 = (0.88)^Z$ and for Valenciennes $P(Z)/P_0 \approx 1\rho_0 = 1.293 \text{ Kg/m}^3$ and $C_p = 1005\text{J/Kg.K}$.

The captive surface A_C is 1.28m^2 . In our case, thermal efficiency (η) is given for a constant global solar flow (I_{GS}) of 1063.5W/m^2 corresponding to solar midday. Therefore, for a specific flow of $35\text{m}^3/\text{h.m}^2$, 54% thermal efficiency was obtained in the case of the solar panel provided with DCL1 baffles. By increasing the flow to $70\text{m}^3/\text{h.m}^2$, 80% thermal efficiency was achieved. In the case of the solar panel without baffles, the respective thermal efficiency percentages obtained with each of the two flows were only 35% and 55% (Fig. 6) for temperatures at the solar panel outlet (T_{WB}) of 61.7°C and 53.3°C as opposed to 82.8°C and 66.3°C in the case of a solar panel provided with DCL1 baffles. However, under the same conditions as above, but using OCL1 baffles, slightly lower results were obtained than those with DCL1 ones. This can be explained by the fact that the airflow section differs and so, and in particular, the progressive fragmentation of swirls occurs a little earlier. Indeed, for the same flows, the respective thermal efficiency percentages are 52% and 76% and correspond to temperatures (T_{WB}) of 81.3°C and 64.8°C . With these configurations using DCL1 and OCL1 type baffles, 50%

thermal efficiency is obtained respectively with flows of $32\text{m}^3/\text{h.m}^2$ and $33\text{m}^3/\text{h.m}^2$ as opposed to $58\text{m}^3/\text{h.m}^2$ when using an SC solar panel where relative flow reductions are respectively 44.8% and 43.1%. The respective temperatures (T_{WB}) are 84.5°C and 82°C as opposed to 55°C . The latter correspond to respective temperature rises ($\Delta T = T_{WB} - T_e$) of 56.1°C and 54°C as opposed to 27.2°C . In both cases, the amounts of charge losses are acceptable.

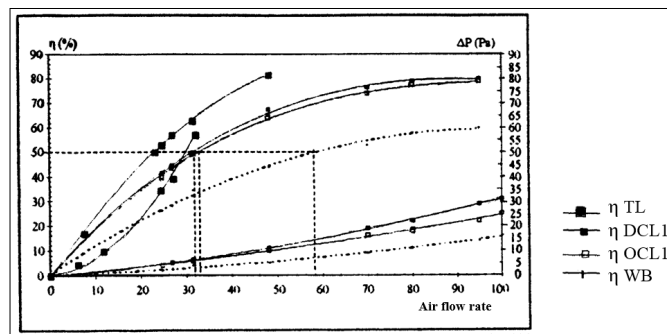


Figure 6: Evolution of thermal efficiency (where $I_{GS} = 1063.5\text{W/m}^2$) and charge losses in relation to air flow as concerns WB solar panels and those provided with different types of baffles (i.e. DCL1, OCL1 and then TL), as at the Valenciennes site

However, the blocking effect of TL baffles enables a very turbulent flow to be created and, consequently, provides a very good level of thermal interchange. It is worth noting that the resultant charge losses are very high because the air flow through the duct is very weak compared with that attained with other types of baffles. A thermal efficiency of 50% obtained with a specific flow of $23\text{m}^3/\text{h.m}^2$ corresponds to a temperature (T_{WB}) of 104°C , i.e. an improvement in temperature (T_e) of 75°C at the solar panel inlet. These results are decidedly better than those obtained when using DCL1 or OCL1 type baffles. The lengthening of the distance covered by the air in the solar panel duct results in an even better interchange of heat between the coolant air and the absorber.

Improving Drying Time

Dating from the early research work of Lewis in 1921 [17] and Sherwood in 1929 [18], techniques of drying have been the subject of many scientific publications and continues to be a priority field of research, especially in respect of countries where traditional methods remain in use and are essential for want of better. As it is readily available at little or no running costs compared with other sources of energy such as electric resistors, solar energy is obviously an alternative [19]. At Valenciennes, simulated solar energy was used to carry out experiments applied to drying pre-dried bergamot ied; the simulator was conceived to provide conditions of a typical July day.

For solar energy to be harnessed effectively, certain difficulties have first to be overcome and to be achieved with the help of technically viable and economically profitable systems. The choice of the type of dryer is conditioned by whether or not the product in question can withstand solar radiation; it also has to be made between direct or indirect dryers and depends, too, on the commercial value of the product. Since the performances of absorbers are higher than the thermal conversion capacity of the product, the use of an indirect dryer is the more effective. The system under study is therefore an indirect solar dryer functioning by thermal forced convection.

The construction of a drying installation is very complex and requires the taking into account of a number of parameters and the mastering of many phenomena before it can be devised. For it to work efficiently, it is necessary, first of all, to estimate the quantities of products to be treated and then to carry out a thorough study of the design of the system. What is important, from the thermal point of view and to ensure that the components of the installation are optimised, is to evaluate the various modes of transfer and to assess the energy-giving potential while taking into account the coupling between the warm air generator and the drying unit with a view to its dimensional set-up. In our experiment, the device (Fig. 1), being constructed with only one plane solar panel and a “drying cupboard” holding four trays {i.e. a simplified version of a sort of kiln}, has been designed to treat small quantities of products and, consequently, equipping it also with means for storing energy; with an auxiliary heating system and with a device for recycling air is therefore unnecessary.

The quantities of heat (Q_u) recovered by the coolant fluid, as far as the absorber is concerned, depends on the efficiency of the solar panel used. Given that these quantities are proportional to the variations in temperature between the inlet and the outlet of the solar panel, the results presented above show that a solar panel provided with baffles functions more efficiently and so baffles are essential fittings because they reduce drying times.

In our experimental work, the objective is to carry out drying by a simulation of solar energy. However, for a given air flow, we wanted to study the variations in certain parameters of the drying process as at different times during the typical day under consideration. In view of the considerable expenditure that could be involved in setting up a real-life operation, the use of thermal forced convection would seem to be less suitable in applying the findings of our small-scale experiment to a large-scale situation. Nevertheless, it would be profitable to take advantage of natural convection in a solar chimney. Its application is, of course, all the more valid in geographical zones deprived of electrical power. The choice between forced and natural convection depends on several factors, in particular on the quantity of the product to be treated, on the capillary structure of that product and its nutritional value while not neglecting the financial budget available. Drying time is indeed of paramount importance. As regards large-scale {industrial} concerns, an external source of energy is required. Where electrical power is available, even if weak but at an affordable rate, it is logical to make use of it to actuate the ventilators, blowers or other devices necessary to increase the efficiency of the system. Where a system functions with natural convection in a solar chimney, the driving force of gravity is created by differences in the density of air between the exterior {ambient conditions} and the interior of the chimney. The height of the chimney, which influences the efficiency of extracting air, is a factor that has therefore to be adequately investigated. Pasumarthi and Sherif have shown that for a given height and an increasing solar flux, the temperature at one and the same given point in the chimney also increases [20,21]. Heat interchange improves but the total charge losses of the system, which are proportional to the height of the chimney and to the differences in air density, increase considerably.

Prior to setting out the findings of our experiments, a brief description of the type of TL baffles used is called for. The height of the large (transversal) baffle is 2.5 cm and that of the Small (longitudinal) one is 2 cm (Fig. 7). The surface A_c is 1.28 m².

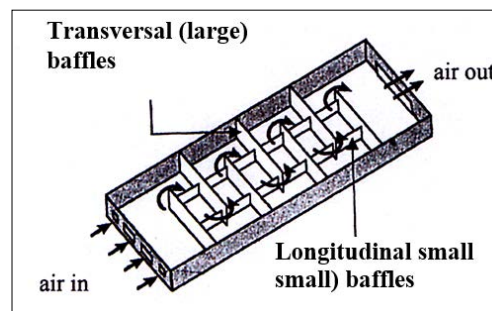


Figure 7: Solar panel equipped with TL type baffles

[Kge/KgMS: kilograms of water per kilograms of dried mass of the product]

To study the influence of the flow of drying air on drying time, it was considered of value to use two flows, one of 31.3m³/h.m², the other of 70m³/h.m². This adjustment is made with the help of a ventilator (solar simulator). The air flow is measured using a “Jules et Richard” anemometer with a 10 cm diameter propeller. With a flow of 31.3m³/h.m², drying times at the first (bottom) tray (Fig. 1) take up to 8 hours as regards the solar panel fitted with DCL1 baffles, 6 hours 35 minutes for that with TL baffles while the longest time taken was with the WB solar panel. There are therefore reductions of drying time of 49% and 59% in comparison with the WB solar panel. The final content of water collected in the WB solar panel is only attained after 14 hours 10 minutes of drying time (Fig. 8).

The air coming from the level of the first tray is still heavy with moisture and, consequently, for this same air flow, drying time at the level of the fourth (top) tray takes longer for all three types of solar panels used. By increasing the flow to 70m³/h.m², drying times decrease in each of the three solar panels. As drying is brought about by force of speed of the flow, this faster flow results in a more rapid evacuation of the moist air.

By increasing the flow from 31.3m³/h.m² to 70m³/h.m², and as regards the solar panel with DCL1 baffles, the drying time at the first tray is reduced by one hour, i.e. a relative reduction of 15 % whereas a relative reduction of 13.8% is attained using a solar panel with TL baffles. The drying times at the level of the fourth tray are respectively 10 hours (DCL1 baffles) and 8 hours (TL baffles). Comparing these results with the performance of the solar panel without baffles, and with a flow of 70m³/h.m², the reductions in drying times at the first tray are respectively 27% and 39.5%.

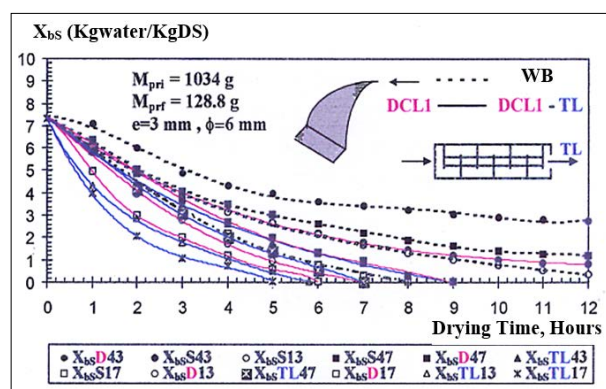


Figure 8: Evolution of the water content (X_{bs}) in relation to drying time measured at the first and fourth trays with flows of 31.3m³/h.m² and 70m³/h.m² using WB, DCL1 and TL type solar panels, data recorded on a typical July day at the Valenciennes site.

A graph (Fig. 9) plots the evolution of the loss of mass (ΔM) at each hour, for each of the two flows and for each of the types of solar panel used. Fig. 10 shows the evolution in temperature of the product (T_{pr}) in relation to the passage of time during the drying process. It is to be noted that for every type of solar panel used, drying takes place at temperatures that vary in accordance with the solar time flux particular to the day on which the experiment is conducted. In every case, a constant phase of drying cannot therefore exist (Fig. 11).

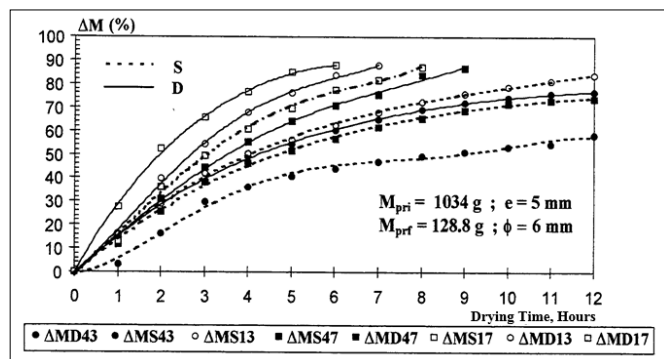


Figure 9: Evolution of the loss of mass (ΔM) of plums in relation to drying time measured at the first and fourth trays with flows of $31.3\text{m}^3/\text{h.m}^2$ and $70\text{m}^3/\text{h.m}^2$ using DCL1 and TL type solar panels, data recorded on a typical July day at the Valenciennes site

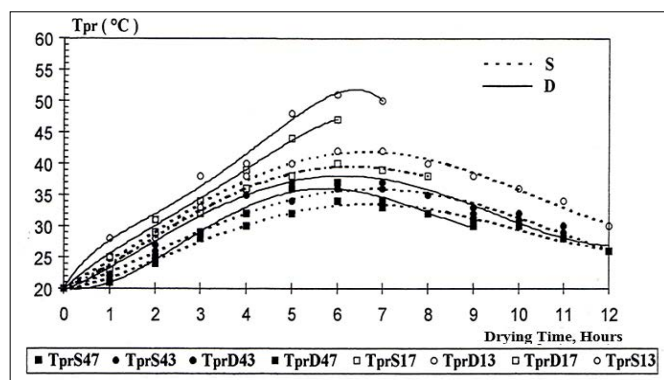


Figure 10: Evolution of the temperature of Lemon in relation to drying time measured at the first and fourth trays with flows of $31.3\text{m}^3/\text{h.m}^2$ and $70\text{m}^3/\text{h.m}^2$ using WB, DCL1 and TL type solar panels

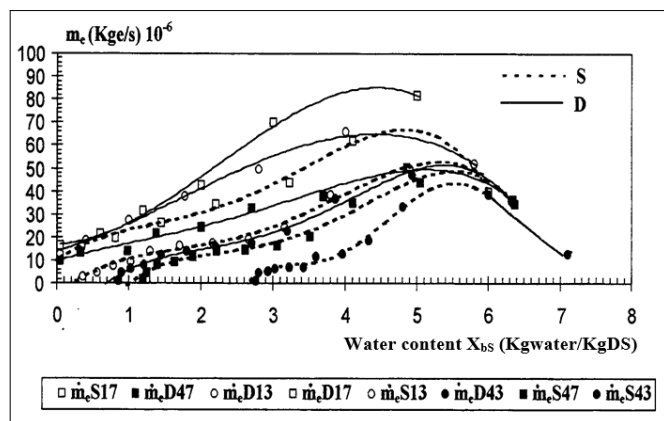


Figure 11: Evolution of the drying speed (m_e) in relation to water content to the point when the product is completely dried with flows of $31.3\text{m}^3/\text{h.m}^2$ and $70\text{m}^3/\text{h.m}^2$ using WB and DCL1 type solar panels

Analysis of the findings relative to the WB solar panel (without baffles), reveals that functioning with a low air flow is considerably more efficient because of the reduction in drying time. The mechanical power consumed (P_{mc}) by the ventilator is proportional to charge losses and to the air flow in the dynamic air vein of the panel. This same power is expressed by:

$$P_{mc} = \Delta P \cdot Q_v = \zeta \cdot Q_v^3 \quad (5)$$

where ζ is the factor of friction, characteristic of artificial rough places (baffles).

As the relationship between the two flows is 2.24, the power is therefore increased by a factor of 11.24, a fact which further highlights preference for using a low flow. In spite of the recommendations made by some research workers not to exceed a drying air temperature of 55°C , higher temperatures were used in our experiments (at around solar midday). However, at temperatures above 70°C , reddening spots (*i.e.* signs of burning) appeared on the products. Indeed, the quality, colour, savour and nutritional value of the product are all closely subjected to conditioning by the thermal process. Consequently, to create ideal drying conditions at temperatures lower than those recommended for the product in question, some precautions can be taken such as:

- Install a temperature indicator at the inlet to the “drying cupboard” and use a higher air flow if necessary to reduce the temperature while bearing in mind that should the increase in the air flow become imperative at midday, it would not be so when the sun is less high and its rays more oblique in relation to the position of the solar panel, *i.e.* in the early morning and late afternoon.
- Install a temperature regulator adjusted to provide a constant drying air temperature of 55°C .

The quantities of heat available for use and reclaimed at the solar panel outlet are much higher when using solar panels equipped with TL baffles than those with DCL1 baffles. Variations in those quantities (Q_u), in global quantities of drying heat (Q_s) and their differences ($\Delta Q = Q_u - Q_s$) are shown in (Fig.12) (for WB solar panels without baffles) and Fig.13 (solar panels equipped with DCL1 baffles). Worthy of note is the fact that the quantities of heat available for use are increased by a factor of approximately 1.65 as regards the performance of the SC solar panel. The differences in quantities (ΔQ) are of some consequence because they are, in fact, surplus to normal requirements for the drying process and can therefore be stored and made available for use, for example, during the night or on days when sunlight is mediocre [22-25]. This excess of heating needs can be kept in underground ducts and thus ready for use when needed.

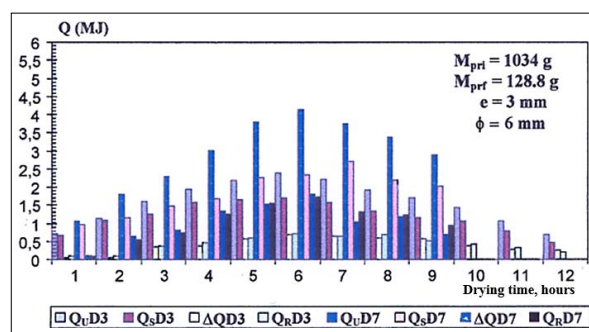


Figure 12: Variations in quantities of heat (Q) in relation to drying time with flows of $31.3\text{m}^3/\text{h.m}^2$ and $70\text{m}^3/\text{h.m}^2$ using an WB type solar panel (without baffles)

Photo 3 At a temperature above 64°, we see the lemon change color from light yellow to reddish yellow and juicy.

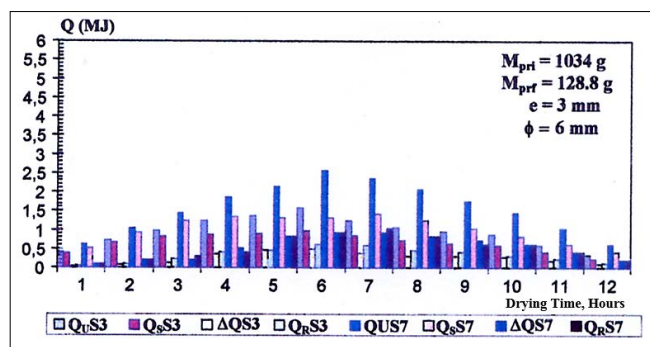


Figure 13: Variations in quantities of heat (Q) in relation to drying time with flows of 31.3m³/h.m² and 70m³/h.m² using a solar panel equipped with DCL1 baffles

Other chemicals



Photograph 3: Bergamot before drying

Citrus fruits are volatile scents called aldehydes. They are therefore the top notes of perfumes, simply because they are the smells that will be the fastest to diffuse. Bergamot is quite simply the favorite aldehyde of perfumers as its tangy fragrance is sublime. Its facets are yellowish, (photo 3) necessarily fruity, while remaining sweet. It explodes the attack of the formula and is often a superb link with the molecules that will follow. The scent of bergamot? Its scent is close to the citrus family: sparkling, fresh and floral, bergamot is highly coveted by perfumers. It is an essence that brings lasting freshness, we even notice at a temperature of 45° to 54° (photo 4) the freshness of the perfume and always present in a perfume. Drying by variable and durable baffle solar collectors with energy savings, the drying of bergamot allows us to preserve citrus fruits for lasting health. This citrus fruit is said to help manage stress and make it easier to fall asleep. In infusion, bergamot would have soothing effects on digestive disorders such as stomach cramps and spasms. The fruit would also fight against intestinal parasites and bergamote to maintain lasting health.

Photo 4 At a temperature of over 52°, the lemon changes color from light yellow to yellow and juicy. We note that the seeds are in fact the component of Lemon that absorbs pollutants the most, as well as pesticides and other chemicals.



Photograph 4: Bergamot after drying

Conclusion

The results of our experiments we note the use of different types of solar panels with variable chican very economical no

pollution and the high quality is the lasting conservation of all the vitamins necessary for health (vitamin C) we not e the fruit the bergamot after drying the pulp stays dry but not dry: solar drying and durable installation of deflectors in the air stream is a very important factor that serves to improve the performance of a given solar panel. Several determinants are of course to be taken into consideration, including the shapes and dimensions of the baffles, the number of rows and their layout. The study showed that a solar panel equipped with baffles not only significantly improves the relationship between temperature and thermal efficiency, it also reduces the drying time of the product. Note also the fact that a reduction in the transverse (Et) and longitudinal (El) spaces contributes considerably to the quality of the results. In addition, an increase in the angle brings even better results. However, certain constraints imposed by the nature of the finished product such as its quality, flavor, color and nutritional value, Characteristics of bergamot must be taken into account • Excellent source of vitamin C; Antioxidant power; Relieves digestive disorders; Has anti-stress properties; Calms skin irritations To determine what constitutes the ideal drying air temperature. Photo 2 and 3 We notice at a temperature above 64° the fruit of the lemon changes color from yellow to reddish yellow and the skin on the outside and very resistant to heat the lemon is above 68°C we note the presence of lemon and very juicy and rich in vitamins and the presence of the aroma of the fruit of Bergamot and very good for lasting health.

It can de deduced from the findings of our experiments using various types of solar panels that the placing of baffles in the air vein is a very significant factor which serves to improve the performance of a given solar panel. Several determinants have, of course, to be taken into consideration to include the shapes and dimensions of the baffles, the number of rows and their layout. The study has shown that a solar panel equipped with baffles not only appreciably improves the ratio between temperature and thermal efficiency but also reduces drying time of the product. Also noteworthy is the fact that a reduction in transversal (Et) and longitudinal (El) spaces contributes considerably to the quality of the results. Moreover, an increase in the angle (Δi) brings about even better results. However, some constraints imposed by the nature of the finished product such as its quality, savour, colour and nutritional value, have to be taken into account in determining what constitutes the ideal temperature of drying air. Photo 2 and 3 We notice at temperature above 64° the lemon fruit changes color from yellow to reddish yellow and the skin outside and very resistant to heat the lemon is above 68° C we note the presence of lemon and very juicy and rich in vitamiane and the presence of the lemon fruit aroma and very good lasting health [30-47].

References

1. Zugary MR, Vullierne JJ (1993) Improving the thermal performance of a solar collector by using a lamella structure. Entropie n° 176: 25-30.
2. Ouard S (1989) Optimization of shapes and arrangement of obstacles in the moving fluid stream of flat solar collectors with two layers of air with a view to maximizing the efficiency and temperature pair. Doctoral thesis. Valenciennes.
3. Moumimi N (1994) Systematic forecasts and optimization of the performance of flat air solar collectors in various sites in Mediterranean or Saharan climates and with or without altitudes. Doctoral thesis. Valenciennes.
4. Ben Slama R (1987) Contribution to the study and development of pumps and solar collectors. Doctoral thesis. Valenciennes.
5. Choudhury C Gary H.P (1993) Performance of air heating collectors with packed airflow passage. Solar Energy 50:

- 205-221.
6. Gbaha P (1989) Study and optimization of heat exchange and performance of flat solar collectors with two air streams. Doctoral thesis. Valenciennes.
 7. Hachemi A (1992) Contribution to the optimization of the thermal performance of flat air insulators with a bed filled with rows of closely spaced obstacles, improvement of efficiency by interaction between radiation and convection. Doctoral thesis. Valenciennes.
 8. Moumami A (1994) Global and local study of the role of geometry in the optimization of flat air solar collectors. Doctoral thesis. Valenciennes.
 9. Météo France (2002) Regional Direction. Villeneuve d'Ascq, Lille.
 10. Ahmed-Zaid A (1998) Optimization of solar air collectors. Application to the drying of agricultural and fishing products. Doctoral thesis.
 11. Messaoudi H, Ahmed-Zaid, Le Ray M (1997) The role of geometry in the improvement or reduction of turbulent heat exchanges in solar air collectors, 3rd Congress of Mechanics, Moroccan Society of Mechanical Sciences and Abdelmalek Essaadi University, Science Faculty of Tetouan, VI, (April 22-25, 97), 637-644.
 12. Ahmed-Zaid A, Messaoudi H, Benoyounes R., Le Ray M (1997) Experimental study of the effect of baffles on flat air solar collectors, by simulation of solar energy, 3rd Maghreb Days on the Mechanics, Institute of Mechanics, Guelma (Algeria) 29-30: 212-218.
 13. Le Ray M, Deroyon JP, Deroyon MJ, Minair C (1985) Angular criteria for the stability of a helical vortex or a pair of rectilinear vortices, the role of the Privileged Angles in the optimization of the wings, sails, hulls of planes and ships. Communication to the Maritime and Aerodynamic Technical Association. ATMA Bulletin. Paris 511-529.
 14. Messaoudi H (1996) Vortex structures induced by complex triangular obstacles and interactions between thin delta wings and bodies of revolution. Application of Privileged Angles, in Aerodynamics and Energetics. Doctoral thesis. Valenciennes.
 15. Abene A (1990) Systematic study of the positions and stability of vortex structures above ogival wings and cones. Doctoral thesis. Valenciennes.
 16. Letz T (1985) Modelling and economic sizing of a dual-energy domestic heating system. Doctoral thesis. INSA Lyon.
 17. Lewis WK (1921) The rate of drying of solid materials, Journal of. Ind and Eng. Chem 13: pp 427-432.
 18. Sherwood TK (1929) The drying of solid 21: pp 12-16.
 19. Kondé G (1983) Resolution of the Luikov equations applied to onion drying in view of the construction of solar dryers in Sahelian countries. Doctoral thesis. Perpignan.
 20. Pasumarthi N, Sherif SA (1998) Experimental and theoretical performance of a demonstration solar chimney model-part II: Experimental and theoretical results & economic analysis, Internat Journal of Energy Research 22: pp 443-461.
 21. ABENE (2014) The study by visualization of vortex structures developed on the upper surface of double delta wings. Philadelphia USA.
 22. Desmons JY (1984) Formulation and numerical resolution of applied boundary problems, to buried tubular heat generators. Doctoral thesis. Valenciennes.
 23. Dubois V (2005) Detailed study of the vortex structures developed on the extrados of simple and complex slender bodies and bodies of revolution. Doctoral thesis. Valenciennes.
 24. Abene A, Dubois V, Michel Le Ray M, A Ouagued ABenyounes R (1993) Numerical and experimental prediction of the intrinsic response of a bitubular exchanger buried in continuous operation. Doctoral thesis. Valenciennes.
 25. Portales B (1984) Study and experimentation of solar heating of greenhouses with underground thermal storage. Doctoral thesis. Valenciennes.
 26. N Dongo MM (1989) Theoretical study of a hot air solar generator consisting of an agricultural greenhouse and underground heat storage using ducts. Application to drying. Doctoral thesis. Clermont -Ferrand II. Blaise Pascal.
 27. Abene A (2004) Study of a solar air flat plate collector: use of obstacles and application for the drying of grape. Journal of food engineering 65.
 28. Abene A, Dubois V, Michel Le Ray M, Ouagued A (2003) Experimental study of the thermal performance of various configurations of baffles placed in the flow path. Les Technologies Avancées n°16, Algiers.
 29. Abene A, Dubois V, Michel Le Ray M, Si-Youcef M, Ouagued A (2005) Experimental study of solar air collectors: the drying of the fig Les Technologies Avancées n°17, Algiers.
 30. Abene A, Dubois V (2009) An experimental study of air heating plane solar panels as used in drying mangoes. International Journal of Energy Research, ref ER-09-1016, June.
 31. Abene A (2015) The Study by Visualization by smoke of Vortex Structures on the upper surface of an aircraft fuselage. Journal of Engineering Aeronaut Science & Research Technology.
 32. Abene A (2013) Visualization of Vortex Structures Developed on the Upper Surface of Double-Delta Wings. J Aeronaut Aerospace Eng 2: 118.
 33. Abene A (2014) Experimental Study by visualization of behavioral properties of vortex structures on the upper surface of an ogive of revolution β 52°. International Journal of Mechanical Engineering and Applications 2: 70-77
 34. Abene A (2014) An Experimental Study of the Drying of Papayas by Solar Panels. J. Sustainable development Studies 7: pp 84-108.
 35. A Abene (2015) An vortex structures on the upper surface of a pointed gothic wing observed at low. median and high incidences - journal of vortex science and technology.
 36. B Yssad, A ABENE, (2015) Rational Reliability centered maintenance optimization for power distribution systems; Journal electrical power and energy systems 73: 350-360.
 37. A Abene, N Mezache, A Rahmani (2015) An Experimental Study of the Mushroom drying by Solar Panels. Impact: international Journal of Research in Engineering & Technology 3: 12.
 38. A Abene, I Hamlaoui (2016) Experimental study of a medicinal plant (Antioxidant ginger) by solar Panels HAS variable Chicane. Impact: International Journal of recherche in engineering and technology.
 39. di Faouzi, N Bibi-Triki, B Draoui, A Abène (2016) comparison of modeling and simulation results management micro climate of the greenhouse by fuzzy logic between a wetland and arid region Imprim ISSN (Online) 2454 - 6119.
 40. Djelloul, Azzouzi, Boussad Boumeddane, Abderrahmane Abene (2017) Experimental and analytical thermal analysis of cylindrical cavity receiver for solar dish. Renewable energy 106: 11-121.
 41. A ABENE (2017) An Experimental Study of the Drying of the girolle mushroom by Solar Panel with variable chicanes, International journal of agriculture Innovations and Research 5: 2319- 1473.
 42. Abderrahmane Abene, Ahmed Rahmani, Zoubir Zahzouh

- (2017) Improving the Basin Type Solar Still Performances Using an Internal Solar Collector. Journal of Solar Energy Recherche.
43. Abderrahmane Abene, Ahmed Rhamani, Rym Ghizlene Seddiki, Aurora Morocini, Richard Guillaum (2017) Heat Transfer Study in 3-Pass Fire-tube Boiler During a Cold Start-Up Journal Science PC 28: 2376-8029.
44. Abderrahmane Abene, Ahmed Rhamani, Rym Ghizlene Seddiki, Aurora Morocini, Mohamed Ramdani, Richard Guillaum (2018) Study of the economic and energy Management of apple fruit drying by Solar air collector. Sch J Appl Sci Res. 1: 19-27.
45. A Abene (2017) An Experimental Study of the Drying of the girolle mushroom by Solar Panel with variable chicanes. International journal of agriculture Innovations and Research. 5: 2329- 1473.
46. Abderrahmane Abene Khelifa Abdenour, Rym Ghizlene Seddiki, Aurora Morocini, Mohamed Ramdani (2018) study of the economic and energy management of apple fruit Drying by a solar air collector. American Journal of Mechanical and Materials Engineering. 1011648.
47. A Abene (2019) Experimental study by visualization of the behavioural properties of the vortex structures and elements on the upper surface of a revolution warhead, International journal of astrobiology & aerospace technology 02: 01.

Copyright: ©2022 Dr. (HDR) Abderrahmane ABENE. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.